

Cartridge Filters for Dampening Water Filtration

Dedicated High-Efficiency Filters for PC-500D/S Series



- Achieves both **high-precision filtration** and **extended service life**
- Features a **density gradient structure**, with finer pores toward the inner layer
- **Efficiently captures** gel-like substances as well as particles of various sizes
- **Combines three types** of filters depending on the level of contamination



【A/B Filters】

High-performance filters with woven cotton-like untwisted fiber for excellent dirt retention.





【C Filter】



Special adsorption filter with high capture for coloring and oil.

Filtration Performance


Business Foam Rotary Press (UV Ink Used)

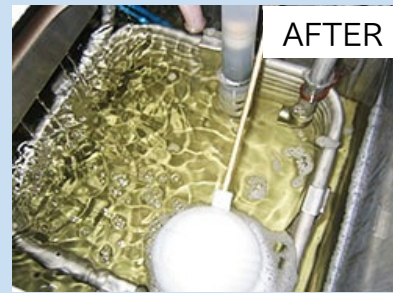

Offset Sheet-fed Press (4-color 40"/ Powder Used)

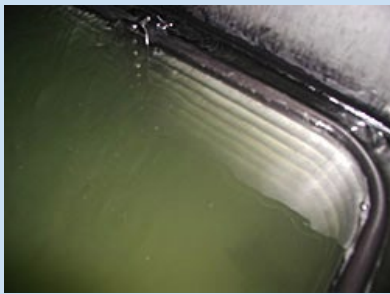

Offset Rotary Press (24 Hours Operation)



To maintain print quality, it is recommended to replace the filters every 3-6 months.
Actual replacement frequency should be decided according to the usage situation.

※ Failures in the equipment when using filters other than the specified filters will not be covered by the warranty.



12-2 Fukakusa Zendoji-Cho, Fushimi-Ku,
Kyoto, 612-8433, Japan

Tel : + 81 75 621 7431

Fax : + 81 75 621 7473

Web : <http://www.cosmotech-jp.com>

E-mail : KYOTO@cosmotech-jp.com

